

Ridgeguide Switch WRD750


Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	7.5GHz		18GHz
Insertion Loss			0.3dB
Isolation	70dB		
VSWR			1.3
Voltage		+24 VDC	+32 VDC
Switching Time		80ms	
Cycle Time		100000	
Storage Temp	-40°C		+75°C
Humidity			80%

Mechanical Specifications:

Item	Specification
RF Ports	FDP (WRD750D24)
Material	Aluminium
Surface Coating	Oxidation
Size & Weight	Custom

Outline: (All dimensions are in millimeters)

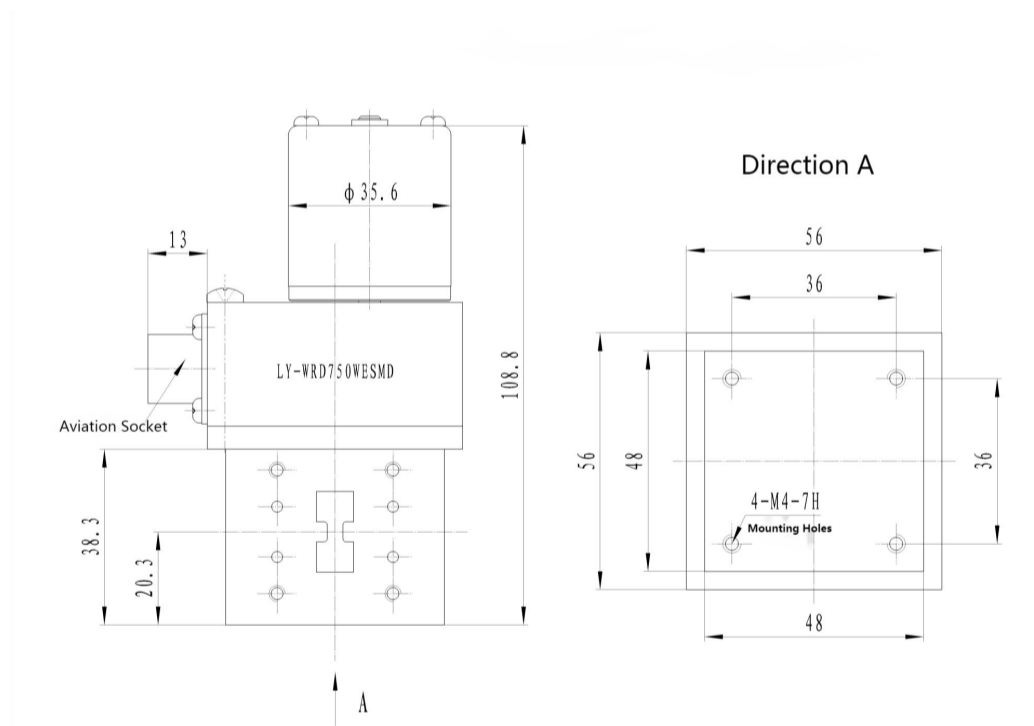

RF Paths:



Caution: Physical dimensions may differ slightly from the above, subject to the actual product.